


The ESDONCAN1L has been designed to protect the CAN transceiver from ESD and other harmful transient voltage events. This device provides bidirectional protection for each data line with a single compact SOT-23 package, giving the system designer a low cost option for improving system reliability and meeting stringent EMI requirements.



**Features**

- 200 W Peak Power Dissipation per Line (8 x 20 sec Waveform)
- Diode Capacitance Matching
- Low Reverse Leakage Current (< 100 nA)
- Low Capacitance High-Speed FlexRay Data Rates
- IEC Compatibility: – IEC 61000-4-2 (ESD): Level 4
  - IEC 61000-4-4 (EFT): 50 A – 5/50 ns
  - IEC 61000-4-5 (Lighting) 3.0 A (8/20 s)
- ISO 7637-1, Nonrepetitive EMI Surge Pulse 2, 8.0 A (1 x 50 s)
- ISO 7637-3, Repetitive Electrical Fast Transient (EFT) EMI Surge Pulses, 50 A (5 x 50 ns)
- Flammability Rating UL 94 V-0
- These are Pb-Free Devices

**Typical Applications**

- Industrial
  - ◆ Smart Distribution Systems (SDS)
  - ◆ DeviceNet

**MAXIMUM RATINGS** (T<sub>J</sub> = 25°C, unless otherwise specified)

Symbol	Rating	Value	Unit
PPK	Peak Power Dissipation, 8 x 20 μs Double Exponential Waveform (Note 1)	200	W
T <sub>J</sub>	Operating Junction Temperature Range	-55 to 150	°C
T <sub>J</sub>	Storage Temperature Range	-55 to 150	°C
T <sub>L</sub>	Lead Solder Temperature (10 s)	260	°C
ESD	Human Body Model (HBM)	8.0	kV
	Machine Model (MM)	400	V
	IEC 61000-4-2 Specification (Contact)	23	kV

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Non-repetitive current pulse per Figure 1.

**ELECTRICAL CHARACTERISTICS** ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{RWM}$	Reverse Working Voltage	(Note 2)	24	–	–	V
$V_{BR}$	Breakdown Voltage	$I_T = 1\text{ mA}$ (Note 3)	26.2	–	32	V
$I_R$	Reverse Leakage Current	$V_{RWM} = 24\text{ V}$	–	15	100	nA
$V_C$	Clamping Voltage	$I_{PP} = 1\text{ A}$ ( $8 \times 20\ \mu\text{s}$ Waveform) (Note 4)	–	33.4	36.6	V
$V_C$	Clamping Voltage	$I_{PP} = 3\text{ A}$ ( $8 \times 20\ \mu\text{s}$ Waveform) (Note 4)	–	44	50	V
$I_{PP}$	Maximum Peak Pulse Current	$8 \times 20\ \mu\text{s}$ Waveform (Note 4)	–	–	3.0	A
$C_J$	Capacitance	$V_R = 0\text{ V}$ , $f = 1\text{ MHz}$ (Line to GND)	–	–	10	pF
$\Delta C$	Diode Capacitance Matching	$V_R = 0\text{ V}$ , $5\text{ MHz}$ (Note 5)	–	0.26	2	%

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


- Surge protection devices are normally selected according to the working peak reverse voltage ( $V_{RWM}$ ), which should be equal or greater than the DC or continuous peak operating voltage level.
- $V_{BR}$  is measured at pulse test current  $I_T$ .
- Pulse waveform per Figure 1.
- $\Delta C$  is the percentage difference between  $C_J$  of lines 1 and 2 measured according to the test conditions given in the electrical characteristics table.

**TYPICAL PERFORMANCE CURVES**


( $T_J = 25^\circ\text{C}$  unless otherwise noted)

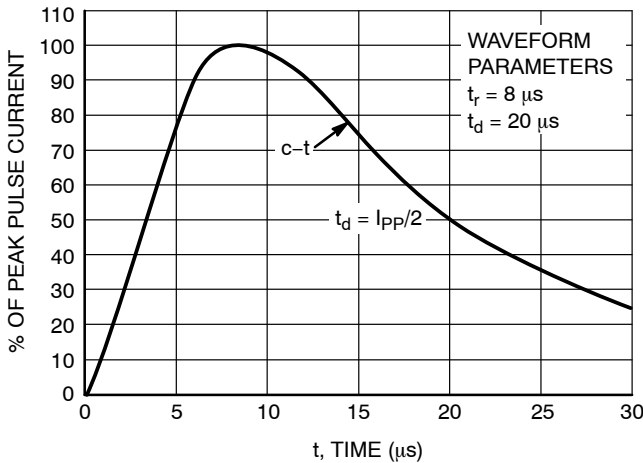


**Figure 1. Pulse Waveform,  $8 \times 20\ \mu\text{s}$**

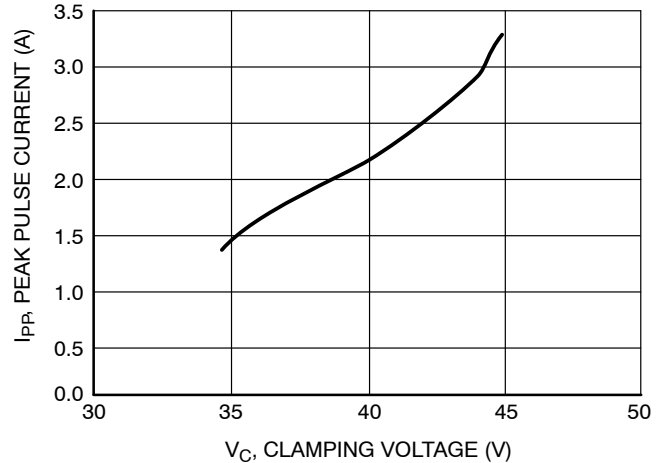


**Figure 2. Clamping Voltage vs Peak Pulse Current**

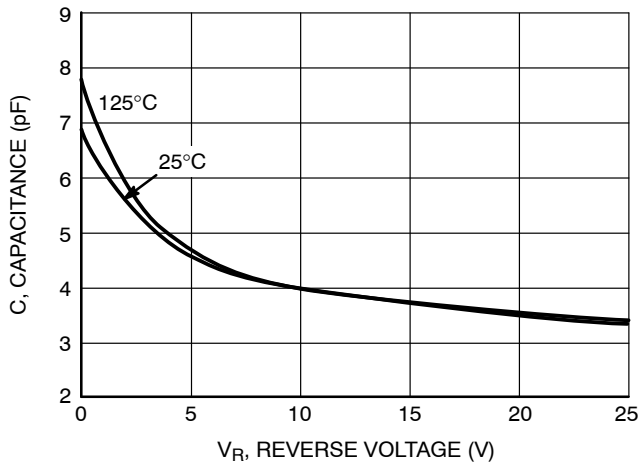


**Figure 3. Typical Junction Capacitance vs Reverse Voltage**

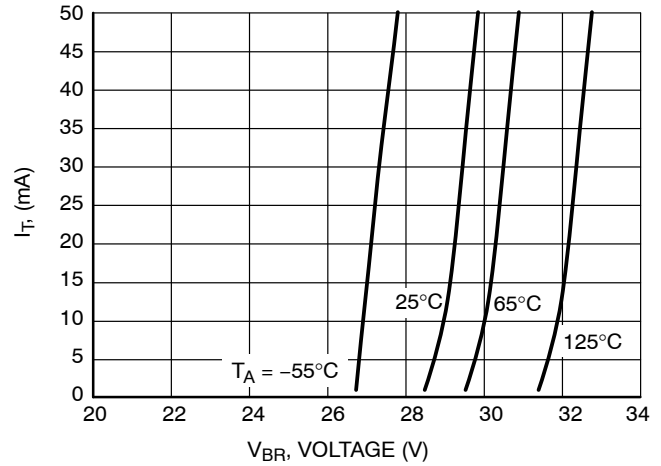

**Figure 4.  $V_{BR}$  versus  $I_T$  Characteristics**

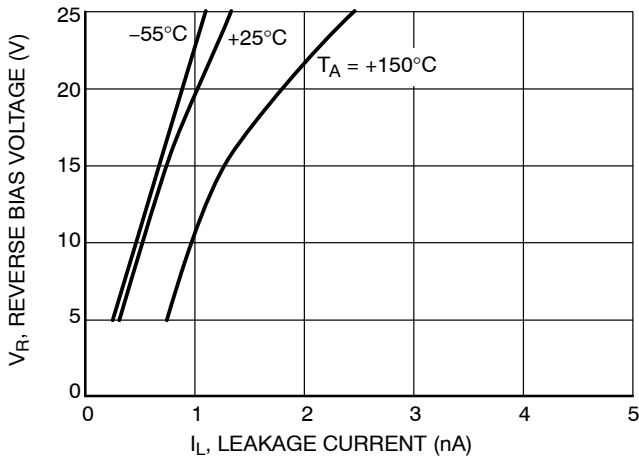


**Figure 5.  $I_R$  versus Temperature Characteristics**

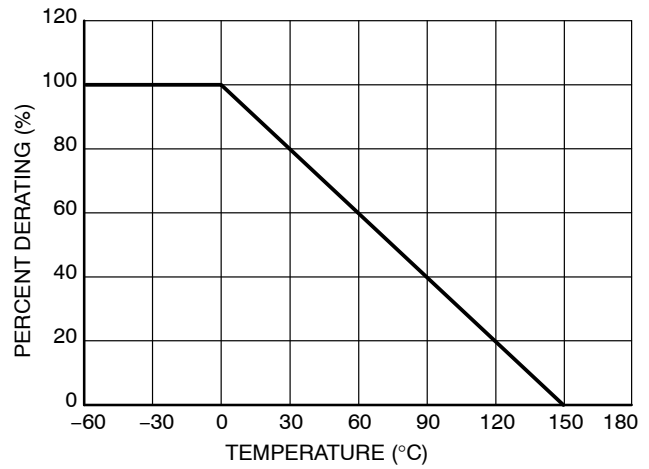


**Figure 6. Temperature Power Dissipation Derating**

**Outline Drawing – SOT-23**

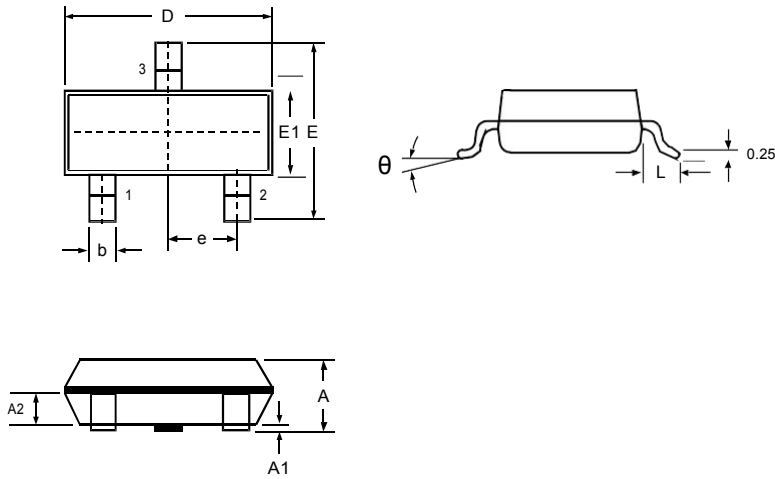

SYMBOL	DIMENSIONS			
	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
D	2.800	3.000	0.110	0.118
b	0.300	0.500	0.012	0.020
E	2.250	2.550	0.089	0.100
E1	1.200	1.400	0.047	0.055
e	0.950 BSC		0.037 BSC	
L	0.500	0.675	0.020	0.027
θ	0	8°	0	8°

**Marking**



**Ordering information**

Order code	Package	Baseqty	Delivery mode
ESDONCAN1LT1G	SOT-23	3000	Tape and reel